

### AUX R32 - Inverter Ducted system Series - AHU30HPV1AO

Job Name \_\_\_\_\_ Location \_\_\_\_\_ Date \_\_\_\_\_  
 Purchaser \_\_\_\_\_ Engineer \_\_\_\_\_  
 For  Reference  Approval   
 Submitted to \_\_\_\_\_ Construction \_\_\_\_\_  
 Unit Designation \_\_\_\_\_ Schedule # \_\_\_\_\_



AHRI No: 217729374

R32 Environmental Refrigerant

Refrigerant Cooling

Flexible Installation

Compatible 485&24V

Fast Cooling / Heating

Quiet And Comfortable

Specifications				
Model			AHU30HPV1AO	
Electric Data	Power Supply		V~,Hz,Ph	208/230,60,1
	Max. Input Consumption		W	4100
	Max. Current		A	18
	MCA	outdoor unit	A	21
	MAX.Fuse	outdoor unit	A	30
	Recommended Breaker Size		A	25
Air Flow Volume			CFM	2471
Noise Level			dB(A)	59
Outdoor Unit	Net Dimensions	H	In.[mm]	31-13/16 [808]
		W	In.[mm]	41-3/16[1046]
		D	In.[mm]	17-15/16[455]
	Package Dimensions	H	In.[mm]	31-11/16[895]
		W	In.[mm]	43-1/2[1105]
		D	In.[mm]	19-1/2[495]
	Weight	Net/Gross	lbs	147.3/156.484
Refrigerant	Charged Volume		OZ	81.13
Pipe	Liquid(O.D.)		In.[mm]	3/8[Φ9.52]
	Gas(O.D.)		In.[mm]	5/8[Φ15.88]
	Max. Length		ft[m]	98[30]
	Max. Height		ft[m]	49[15]
Ambient Temp Range		Cooling	°F (°C)	5~125(-15~52)
		Heating	°F (°C)	5~75(-15~24)
Connection Wiring		Power Wiring (Outdoor)	AWG	12
		Signal Wiring	AWG	22


### Remarks:

- All specifications are subject to change by the manufacturer without prior notice.
- All units are being tested and comply to AHRI210/240.
- Sound pressure levels are measured in anechoic chamber.  
During actual operation, sound pressure level will be higher as a result of room specification condition.
- Data from AUX lab,30/09/24, Data may change according to test surroundings, AUX reserves right of explanation on data.

# Dimensions

Indoor Unit

AHU30HPV1AO

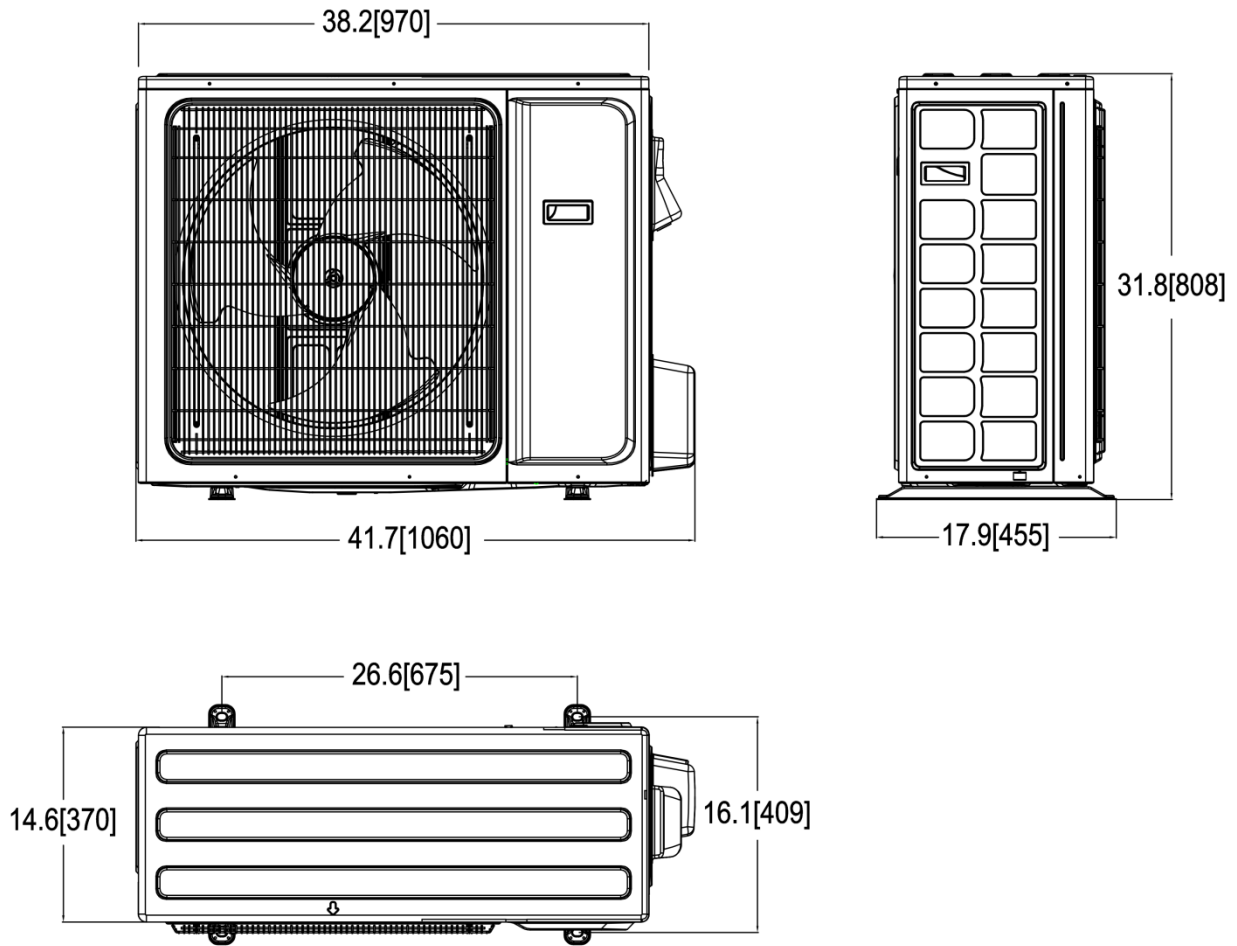

AUX-S-110624

Specifications are subject to change without notice.

© 2024 Aux Cloud Commerce (USA) Inc. All rights reserved