

AUX R32 - Inverter Ducted system Series - AHU30HPV1AI

Job Name _____ Location _____ Date _____
 Purchaser _____ Engineer _____
 For Reference Approval
 Submitted to _____ Construction _____
 Unit Designation _____ Schedule # _____



AHRI No: 216030571

- R32 Environmental Refrigerant
- Refrigerant Cooling
- Flexible Installation
- Compatible 485&24V
- Fast Cooling / Heating
- Quiet And Comfortable

Specifications				
Model	Indoor unit			AHU30HPV1AI
	Outdoor unit			AHU30HPV1AO
Cooling	Capacity	Rated	Btu/h	30000
	Capacity Range	Min-Max	Btu/h	8000-30000
	Power Input	Rated	W	3000
Heating	Capacity at 47°F	Rated	Btu/h	32000
	Capacity Range	Min-Max	Btu/h	4500-33000
	Power Input at 47°F	Rated	W	2605
Electric Data	Power Supply		V~,Hz,Ph	208-230,60,1
	Rated Cooling Current		A	13.31
	Rated Heating Current		A	11.56
	MCA	Indoor unit	A	5.7
	MAX.Fuse	Indoor unit	A	10
Efficiency	SEER2		(Btu/h)/W	18.00
	HSPF2(Region IV)		(Btu/h)/W	8.50
	EER2		(Btu/h)/W	10.00
	COP		W/W	3.60
Indoor Unit	Indoor Air Flow	Hi/Mi/Lo	CFM	1000/820/650
	Noise Level	Hi/Mi/Lo	dB(A)	50/48/46
	External Static Pressure		in.w.g	0.5(0~1)
	Net Dimension	H	In.[mm]	49[1245]
		W	In.[mm]	21[534]
		D	In.[mm]	21[534]
	Packing Dimension	H	In.[mm]	55-1/2[1410]
		W	In.[mm]	24-5/8[625]
D		In.[mm]	27-3/4[705]	
Weight	Net/Gross	lbs	132.9/152.1	
Pipe	Liquid(O.D.)		In.[mm]	3/8[Φ9.52]
	Gas(O.D.)		In.[mm]	5/8[Φ15.88]
	Max. Length		ft[m]	98[30]
	Max. Height		ft[m]	49[15]



Submittal Data Sheet - AHU30HPV1AI

Operation Temperature Range		°F (°C)	61~90(16~32)
Ambient Temp Range	Cooling	°F (°C)	5~125 (-15~52)
	Heating	°F (°C)	5~75(-15~24)
Connection Wiring	Power Wiring (Indoor)	AWG	18
	Signal Wiring	AWG	22

Remarks:

- 1.All specifications are subject to change by the manufacturer without prior notice.
- 2.All units are being tested and comply to AHRI210/240.
- 3.Sound pressure levels are measured in anechoic chamber.
During actual operation, sound pressure level will be higher as a result of room specification condition.
- 4.Data from AUX lab,30/09/24, Data may change according to test surroundings, AUX reserves right of explanation on data.



AUX-S-110624

Specifications are subject to change without notice.







© 2024 Aux Cloud Commerce (USA) Inc. All rights reserved

Dimensions

Indoor Unit

AHU30HPV1AI

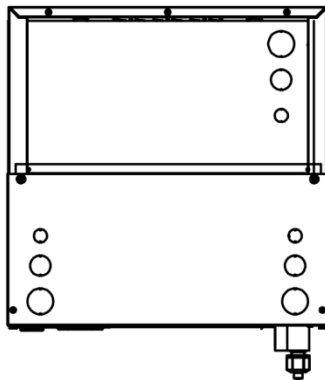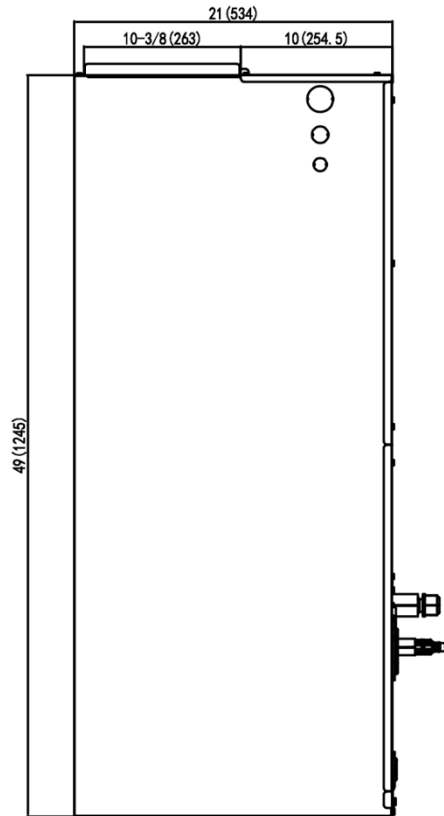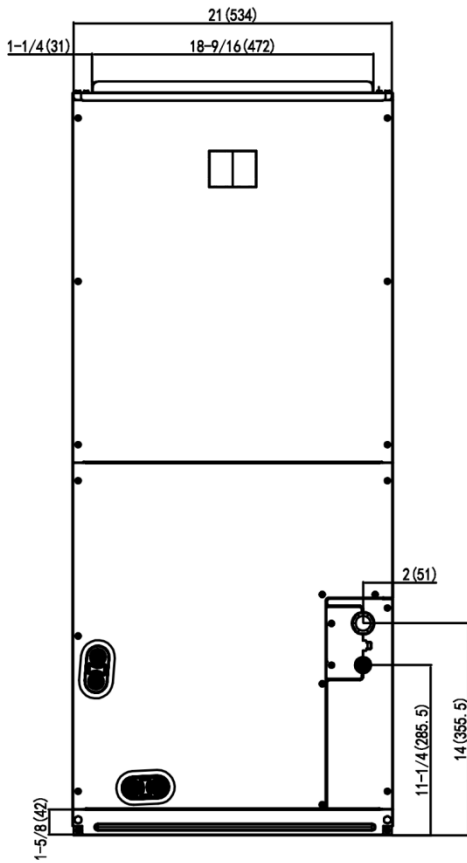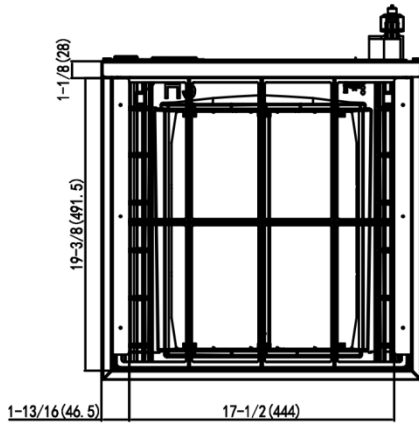

AUX-S-110624

Specifications are subject to change without notice.

© 2024 Aux Cloud Commerce (USA) Inc. All rights reserved